


Pro Stereo Breakout

HMX-000Y

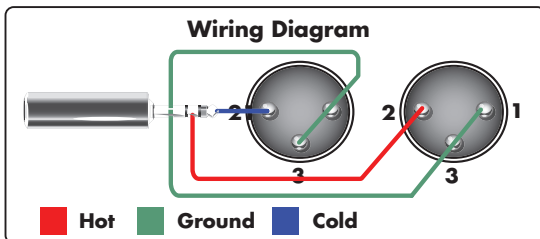

Specifications

Series	HMX-000Y
Lengths	3, 6, 10, 15 ft
Single Connector	REAN 3.5 mm TRS
Dual Connectors	REAN XLR3M
Conductors	24 AWG OFC
Shield	90% OFC Spiral
Conductor DC Resistance	$\leq 80 \text{ m}\Omega/\text{m} - 20^\circ\text{C}$
Screen DC Resistance	$\leq 40 \text{ m}\Omega/\text{m} - 20^\circ\text{C}$
Insulation Resistance	$> 1 \text{ G}\Omega/\text{km} - 20^\circ\text{C}, 500 \text{ V}_{\text{DC}}$
Capacitance Conductor to Conductor	$\leq 80 \text{ pF}/\text{m} - 1 \text{ KHz}$
Capacitance Conductor to Screen	$\leq 140 \text{ pF}/\text{m} - 1 \text{ KHz}$
Test Voltage: Conductor to Conductor	500 V eff - 50 Hz, 1 Minute
Test Voltage: Conductor/Screen	1,000 V eff - 50 Hz, 1 Minute

Hosa
Connecting what moves you